

Power Pack **CP100**

User Manual



COMPONENTS



Main unit



Input cable



Output cable




User manual

(Option)



Adapter




Home charger



Cigar charger

OUTLOOK

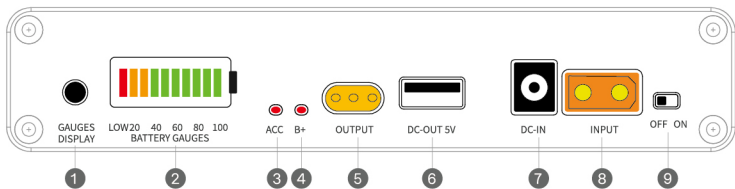


No.	Part	Description
1	DISPLAY	Checking battery level in parking mode
2	LED BAR	Checking charging status and battery level - In driving : LED Left → Right individual lighting - In parking : Shows battery level (%)
3	ACC	Lights up when ACC is connected normally (over 11V) ※ Recheck ACC and GND connections when not lit
4	B+	Lights up when B+ is connected normally (over 11V) ※ Recheck B+ and GND connections when not lit
5	OUTPUT	Power output for dashcam connection
6	DC-OUT 5V	Power output to connect a 5V electronic good (USB type, 5V, 1.5A max)
7	DC-IN	Charging using a external adapter or cigar chager (MAX 3A)
8	INPUT	12V power input
9	ON/OFF SWITCH	Turn the main unit power on/off

○ SPECIFICATION

Model	Capacity	Charging time	Power		Run time	
	(12.8V)	Over 90%	Input	Output	3W	5W
CP100	8,000mAh(96Wh)	60min	11V~16V	Max 3A 11V~13.5V	abt 38hr	abt 23hr

○ INSTALLATION

※ Be sure to install the product in the OFF state and turn it ON after all installations are complete.

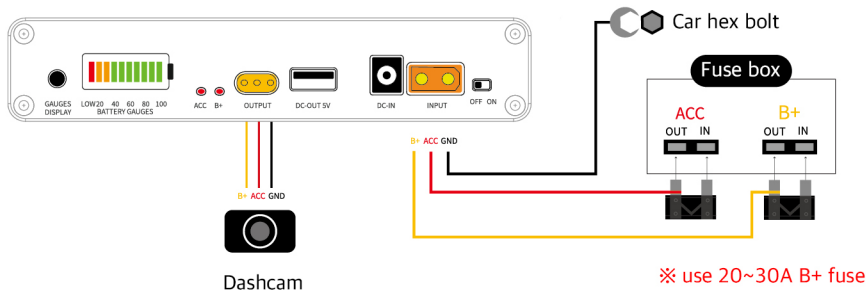

※ Any other wiring and arbitrary extension are strictly prohibited.

→ Cable extension or conversion may cause fire.

→ Please contact the supplier for cable extension.

※ Do not use ACC cable for charging purpose.

※ Do not connect the ACC and B+ wires together. Connect them to separate fuses.

○ CAUTIONS

- 1 When installing in a vehicle, use the genuine cable provided by the manufacturer.
- 2 Do not mix or connect with similar products from other companies.
- 3 When disposing of the product, completely discharge the battery and dispose of it separately.
- 4 Read the installation manual carefully before installing.
- 5 After installation, check for normal operation (check for dash cam continuous/parking recording).
- 6 Do not connect the GND connection to plastic or painted surfaces.
- 7 After installation, turn the power switch to ON. [Shipped OFF at time of delivery]
- 8 After completing the wiring work on the vehicle, connect the input/output connectors to the product.